

JUKI®

Super-high-speed, Cylinder-bed, Overlock Machine

MO-6900C Series



MO-6914C

MO-6900C Series

New and powerful machine for sewing tubular materials !

The MO-6900C Series sewing machine, provided with a small-in-diameter cylinder bed, is capable of runstitching or blind-hemming tubular materials, such as sleeve cuffs, with ease. The operator can carry out sewing of the tubular material while turning it downward. This promises improved workability and contributes to dramatically increased productivity.



MO-6904C

The machine ensures both beautiful and upgraded seam quality at higher speeds.

Since the machine comes with a needle-thread take-up mechanism as well as a looper thread take-up mechanism, to enable sewing with a lower tension applied to the material, it achieves soft-feeling high-quality seams.



MO-6914C


Mechanisms that promise improved operability.

Since the machine is provided as standard with the bottom feed dog inclination-adjusting mechanism and the external differential feed-increasing mechanism, it can be easily adjusted to ideally match the material being sewn. In addition, the machine is provided as standard with a micro lifter feature that offers improved responsiveness to materials, and provides the operator with upgraded operability. The stitch length can be easily adjusted with the push-button mounted on the front surface of the sewing machine.




The needle thread heat remover and needle cooler are equipped as standard.

To offer improved sewing capabilities as well as to prevent stitching mishaps during high-speed sewing, the machine is provided as standard with the needle thread heat remover and needle cooler.

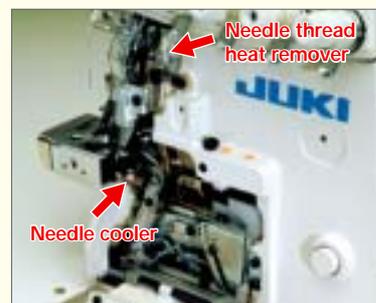

Further increased reliability.

The introduction of a shield-structured needle bar mechanism and upper and lower needle bar bushings, contributes to increased durability and reliability. The machine is provided as standard with a cartridge type oil filter and cooling fan, thereby ensuring enhanced reliability.

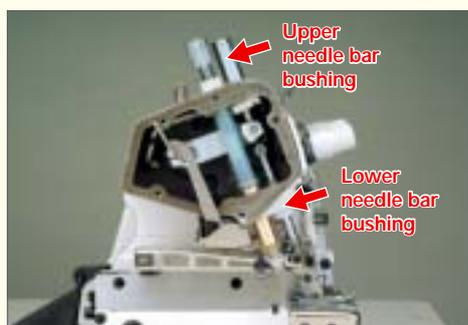

Small-in-diameter cylinder bed.

The cylinder bed is bestsuited to the runstitching and blind hemming of tubular materials. Gauges and devices you have used with your existing JUKI machines are also interchangeable with no additional machining required. This eliminates both the waste of resources and unwanted extra costs.



SUBCLASS MACHINE LIST

Seams	Model No.	Materials	Number of needles	Number of threads	Needle gauge (mm)	Overedging width (mm)	Number of feed dog rows	Stitch length (mm)	Bottom differential-feed ratio	Presser lifting amount (mm)	Needle system	Max. sewing speed (rpm)	Remarks
-------	-----------	-----------	-------------------	-------------------	-------------------	-----------------------	-------------------------	--------------------	--------------------------------	-----------------------------	---------------	-------------------------	---------

< 1-needle overlock >

	MO-6904C-0D6-307	L - M	1	3	-	3.2	3	3.5	1:0.8 ~ 1:2.3	7	DC x 27 #11	8,000	Upper looper extra high throw type
	MO-6904C-0E6-307		1	3	-	4.0	3	3.5	1:0.8 ~ 1:2.3	7	DC x 27 #11	8,000	
	MO-6904C-0F4-307		1	3	-	4.8	2	3.5	1:0.8 ~ 1:2.3	7	DC x 27 #14	8,000	

< 2-needle overlock >

	MO-6914C-BD4-307	L - M	2	4	2.0	3.2	2	3.5	1:0.8 ~ 1:2.3	6.5	DC x 27 #11	8,000	Upper looper extra high throw type
	MO-6914C-BD6-307		2	4	2.0	3.2	3	3.5	1:0.8 ~ 1:2.3	6.5	DC x 27 #11	8,000	
	MO-6914C-BE6-307		2	4	2.0	4.0	3	3.5	1:0.8 ~ 1:2.3	6.5	DC x 27 #11	8,000	

DEVICES AND ATTACHMENTS

Model	Part No.	Description
-------	----------	-------------

Chain-off thread trimming device

T043	MAT-043000A0	Pneumatic side cutter
------	--------------	-----------------------

Blower-type chain-off thread suction device

MC-7B		Blower-type chain-off thread suction device + cloth chips
-------	--	---

Pneumatic chain-off thread suction device

MC-38		Pneumatic chain-off thread + cloth chips
MC-39		Function of MC-8 + auto-lifter

* The aforementioned devices are not equipped with air regulator.
Please purchase the following components when you need to regulate air pressure.

	PF-0552010-B0	Air regulator (F.R. unit asm.)
	GMD-01080000 x 2	Fixing screw for F.R. unit asm.
	F1021-003-000	Tube connector (male)
	GAS-12063000 *	One-touch connector * Selection parts instead of the tube connector

Auto-lifter

AK93	GAK-930000A0	Pneumatic type (knee-operated)
AK94	GAK-940000A0	Pneumatic type (with chain-off thread suction device)
AK102	GAK-A02000A0	Pneumatic type (for servomotor)

Model	Part No.	Description	Feature
-------	----------	-------------	---------

Blind hemming device

L124	MAL-124000A0	Blind stitch hemming attachment	A ruler used for blind hemming in knits		
L125	MAL-125001A0	Automatic folded-edge controlled blind hemming device	The attachment automatically detects the overlapped section of a material. Then, it makes the needle enter the material deeper to prevent stitch deviation.		
	MAL-125002A0			For flat upper knife	For 110, 115, 220, 240V
	MAL-125001AA			For square upper knife	For 110, 115, 220, 240V
	MAL-125002AA			For square upper knife	For 220, 380, 415, 440V

Cloth tensioner

TR01		Small-diameter roller for rib attaching
TR02		Large-diameter cloth tensioner

Ruler, Miscellaneous

H153	MAH-153000A0	Cloth edge guide ruler	A swing type edge guide.
	122-26155	Cloth plate	Wider material can be sewn by attaching the cloth plate.

[Reference]

Combination table of "chain-off thread suction device" and "auto-lifter" which correspond to "chain-off thread trimming device".


Chain-off thread trimming device	Chain-off thread suction device	Auto-lifter	
T043	+	MC-7B	AK102 (JUKI servomotor)
		*	AK94 (any motor will do) * AK94 is equipped with chain-off thread suction device.
		MC-38	AK102 (JUKI servomotor)
		MC-39	(MC-39 is equipped with auto-lifter.)

SPECIFICATIONS

Model name	MO-6904C	MO-6914C
Stitch type	1-needle overlock	2-needle overlock
Stitch style in the U.S.A.	504	514
Max. sewing speed	8,000rpm	
Stitch length	0.8 ~ 3.5mm	
Needle gauge (mm)	-	2.0
Overedging width (mm)	3.2, 4.0, 4.8	3.2, 4.0
Differential feed ratio	For gathering 1:2.3 (max. 1:4.5), For stretching 1:0.8	
Needle bar stroke	24.5mm	
Inclination angle of the needle	20°	
Needle mechanism	Needle bar method and upper/lower bushing	
Needle	DC x 27	
Max. lift of the presser foot	7mm (excluding some subclass model)	
Max. presser foot pressure	63.7N (6.5kg)	
Stitch adjusting method	By push-button	
Differential-feed adjusting method	By lever	
Weight of the machine head	24kg	
Lubrication	Automatic	
Lubricating oil	JUKI Machine Oil 18 (equivalent to ISO VG18)	
Needle cooler	Provided as standard	
Needle thread heat remover	Provided as standard	
Micro-lifter	Provided as standard	

WHEN YOU PLACE ORDERS

Please note when placing orders, that the model name should be written as follows:

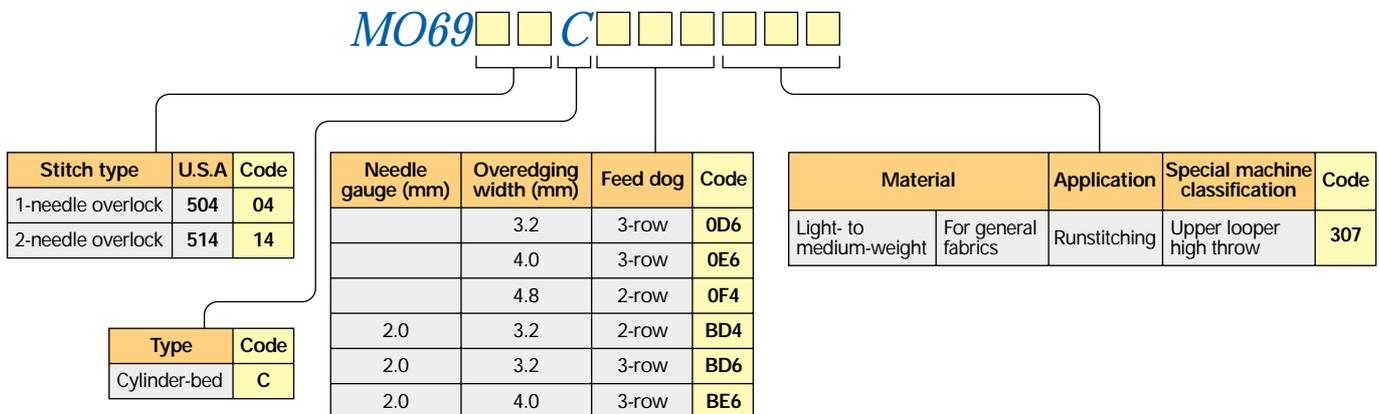

- To order, please contact your nearest JUKI distributor.



JUKI CORPORATION HEAD OFFICE
 The environmental management system to promote and conduct
 (1) the technological and technical research, the development and
 design of the products in which the environmental impact is
 considered,
 (2) the conservation of the energy and resources, and the recycling,
 in the research, development, design, distribution, sale and
 maintenance service of the industrial sewing machines,
 household sewing machines and industrial-use robots, etc. and
 in the purchase, distribution and sale of the household
 commodities including the healthcare products.

JUKI
JUKI CORPORATION
MARKETING & SALES H.Q.

8-2-1, KOKURYO-CHO, CHOFU-SHI,
 TOKYO 182-8655, JAPAN
 PHONE : (81) 3-3480-2357, 2358
 FAX : (81) 3-3430-4909, 4914
<http://www.juki.com>

- * Specifications and appearance are subject to change without prior notice for improvement.
- * Read the instruction manual before putting the machine into service to ensure safety.
- * This catalog is printed on recycle paper.